






REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	
B	A-1	NO.4 WAS CHANGED\RD-DM89011701B\01-17-00'	

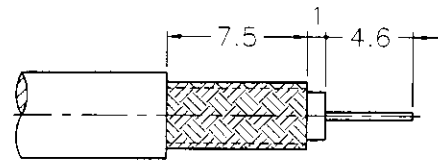

RECOMMENDED
CABLE STRIPPING DIM'S
(STEP 1)
(建議剝線尺寸)



(STEP 2)

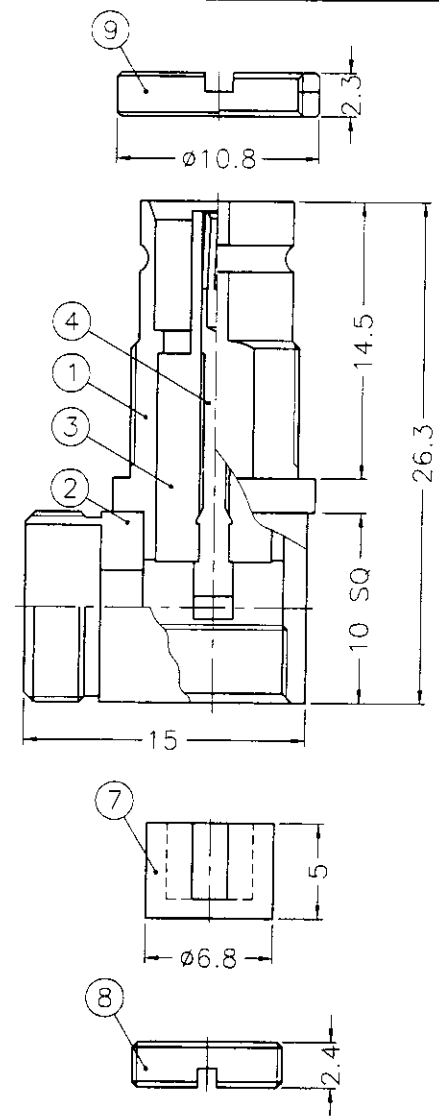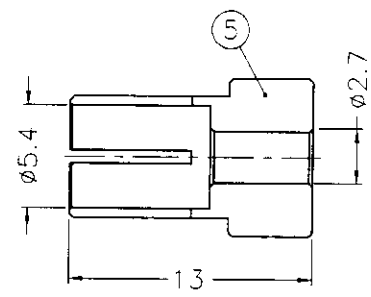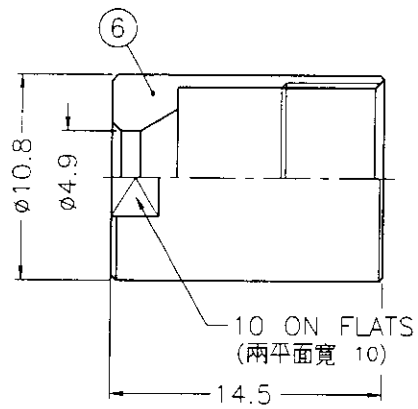

業務部

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- 1. BRASS PER QQ-B-626
 - 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 3. PHOSPHOR BRONZE PER QQ-B-750
 - 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 5. TEFLON MIL-P-19468

9	NUT	NOTE 1	NOTE 2	1	RN108-9-05X23S
8	NUT	NOTE 1	NOTE 2	1	15687061606-5
7	INSULATOR	DELFIN	NATURAL	1	15687061606-4
6	NUT	NOTE 1	NOTE 2	1	1566442A1-7-49
5	BRAID CLAMP	NOTE 1	NOTE 2	1	1566442A1-6-54 /27
4	CONTACT PIN	NOTE 3	NOTE 4	1	1566412A1-4-B
3	INSULATOR	NOTE 5	NATURAL	1	1566412A1-3-B
2	HOUSING	NOTE 1	NOTE 2	1	1566442A1-2-27
1	OUT CONTACT	NOTE 1	NOTE 4	1	1566412A1-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	
SCALE	2.5/1	ISSUE	B

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	1.6-5.6 R/A CLAMP JACK (FOR 2YCCY CABLE)
DRAWING NO.	KJ-1566442A1-N/3GT3G-2YCCY-75
FILE NO.	F:\DWG\156\6442A1\2YCCY-75\N3GT3G

89.1.28
K & U