


TFC Coaxial Cable Product Information Sheet

Type: TWB 2401

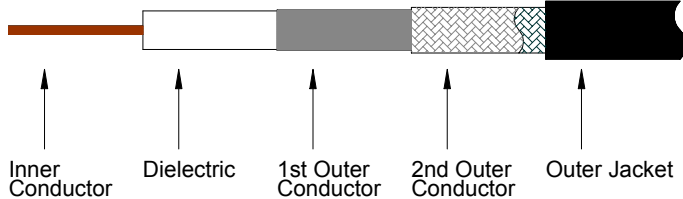

TWB 2401 Coaxial Cable
 Copper Conductor
 Foamed Polyethylene Dielectric
 Bonded APA Laminate Shield
 95% Tinned Copper Braid
 Black Polyethylene Jacket

Cable Ordering Information

Part Number	MI Number	NEC / CSA Listing
TWB 2401	922002216	none

Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper	0.0560	1.42
Dielectric	Foamed Polyethylene	0.150	3.81
1 st Outer Conductor	Sealed APA Tape	0.157	3.99
2 nd Outer Conductor	95% Tinned Copper Braid	0.182	4.62
3 rd Outer Conductor	---	---	---
4 th Outer Conductor	---	---	---
Floodant	---	---	---
Jacket	Polyethylene, Black	0.240	6.10
Twisted Pairs	---	---	---
Messenger	---	---	---

Mechanical Specifications

Minimum Bend Radius, in. (mm)		0.75	(19.05)
Product Weight	(less reel)	35 lbs /kft	

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: twb2401_6.0ghz06
 Revision: 2.10.2006
 Page: 1 of 3

uncontrolled copy
 All Rights Reserved,
 Specifications subject to change without notice

TFC Coaxial Cable Product Information Sheet

Type: TWB 2401

Average Power Rating @ 104°F (40 °C) Ambient VSWR 1.0, Inner Conductor Temperature @ 100 °C	
Frequency, MHz	Kw
30	1.49
50	1.15
150	0.66
220	0.54
450	0.38
900	0.26
1500	0.20
2000	0.17
2500	0.15
3000	0.14
3500	0.13
4000	0.12
4500	0.12
5000	0.11
5250	0.11
5500	0.10
6000	0.10

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: twb2401_6.0ghz06
Revision: 2.10.2006
Page: 3 of 3

uncontrolled copy
All Rights Reserved,
Specifications subject to change without notice